

# NEW 48V MODULE (C0B)

**DuraBlue™**  
Advanced Shock & Vibration Technology

## FEATURES AND BENEFITS\*

- New, improved internal cells
- Improved 3,000 hour DC life at rated voltage and max. operating temperature
- Up to 1,000,000 duty cycles or 10 year life at room temperature
- Active cell balancing
- Temperature output
- Overvoltage outputs available
- Extreme vibration environment compatible

## TYPICAL APPLICATIONS

- Hybrid vehicles
- Railway
- Heavy industrial equipment

## ORDERING INFORMATION

Model Number	BMOD0165 P048 C0B
Part Number	<b>135896</b>
Package Quantity	60



## PRODUCT SPECIFICATIONS

### ELECTRICAL

### BMOD0165 P048 C0B

Rated Capacitance <sup>1</sup>	165 F
Minimum Capacitance, initial <sup>1</sup>	165 F
Maximum Capacitance, initial <sup>1</sup>	198 F
Maximum ESR <sub>DC</sub> , initial <sup>1</sup>	6.0 mΩ
Test Current for Capacitance and ESR <sub>DC</sub> <sup>1</sup>	100 A
Rated Voltage	48 V
Stored Energy <sup>4</sup>	53 Wh
Absolute Maximum Voltage <sup>2</sup>	51 V
Module Over Voltage (OV) Alarm "ON" Range <sup>†</sup>	Nom 48.7 V
Cell Over Voltage (OV) Alarm	Nom 2.70 V
Cell Balance Voltage	Nom 2.30 V
Absolute Maximum Current	1,600 A
Maximum Series Voltage	800 V
Capacitance of Individual Cells <sup>8</sup>	3,000 F
Stored Energy, Individual Cell <sup>8</sup>	3.0 Wh
Number of Cells	18

### TEMPERATURE

Operating Temperature (Cell Case Temperature)	
Minimum	-40°C
Maximum	65°C

\*Results may vary. Additional terms and conditions, including the limited warranty, apply at the time of purchase. See the warranty details for applicable operating and use requirements.  
†Estimated based on typical cell capacitance variation and alarm circuit tolerance range.

## PRODUCT SPECIFICATIONS (Cont'd)

### PHYSICAL

### BMOD0165 P048 C0B

Mass, typical	13.8 kg
Power Terminals	M8 / M10
Recommended Torque - Terminal	20 Nm (M8) / 30 Nm (M10)
Vibration Specification	ISO 16750-3, Table 12
Shock Specification	IEC 60068-2-27, 25 g / 6 ms / 3 cycles/axis
Environmental Protection	IP65
Cooling	Natural Convection

### MONITORING / CELL VOLTAGE MANAGEMENT

Internal Temperature Sensor <sup>3</sup>	NTC Thermistor (10 kΩ)
Temperature Interface	Analog
Cell Voltage Monitoring <sup>3</sup>	Overvoltage Alarm (open collector)
Connector (Mating)	Deutsch DTM04-4P, Amphenol ATM04-4P
Cell Management System	CMS 2.8-Z18

### SAFETY

Short Circuit Current, typical (Current possible with short circuit from rated voltage. Do not use as an operating current.)	8,000 A
Certifications	REACH, RoHS
High-Pot Test <sup>9</sup>	3,700 VDC
Insulation Resistance, minimum (20°C, <70% RH)	150 MΩ
After Humidity Exposure, (40°C, 85%, 21 days), minimum	50 MΩ

## TYPICAL CHARACTERISTICS

### THERMAL CHARACTERISTICS

BMOD0165 P048 C0B


Thermal Resistance ( $R_{ca}$ , All Cell Cases to Ambient), typical <sup>5</sup>	0.50°C/W
Thermal Capacitance ( $C_{th}$ ), typical	13,900 J/°C
Maximum Continuous Current ( $\Delta T = 15\text{ °C}$ ) <sup>5</sup> (BOL, Beginning of Life)	71 A, RMS

### LIFE


<b>DC Life at High Temperature<sub>1</sub></b> (held continuously at Rated Voltage and Maximum Operating Temperature)	3,000 hours
Capacitance Change (% decrease from minimum initial value)	20%
ESR Change (% increase from maximum initial value)	100%
<b>Projected DC Life at 25°C<sub>1</sub></b> (held continuously at Rated Voltage)	10 years
Capacitance Change (% decrease from minimum initial value)	20%
ESR Change (% increase from maximum initial value)	100%
<b>Projected Cycle Life at 25°C<sub>1,6,7</sub></b>	1,000,000 cycles
Capacitance Change (% decrease from minimum initial value)	20%
ESR Change (% increase from maximum initial value)	100%
Test Current	100 A
<b>Shelf Life</b> (Stored uncharged at 25°C)	4 years

## NOTES

1. Capacitance and  $ESR_{DC}$  measured at 25°C using specified test current per waveform below.
2. Absolute maximum voltage, non-repeated. Not to exceed 1 second.
3. Please refer to module user manual for additional technical details.
4.  $E_{\text{stored}} = \frac{1}{2} \frac{CV^2}{3,600}$
5.  $\Delta T = I_{RMS}^2 \times ESR \times R_{ca}$
6. Cycle using specified test current per waveform below.
7. Cycle life varies depending upon application-specific characteristics. Actual results will vary.
8. Per United Nations material classification UN3499, all Maxwell ultracapacitors have less than 10 Wh capacity to meet the requirements of Special Provisions 361. Both individual ultracapacitors and modules composed of those ultracapacitors shipped by Maxwell can be transported without being treated as dangerous goods (hazardous materials) under transportation regulations.
9. Duration = 60 seconds. Not intended as an operating parameter.

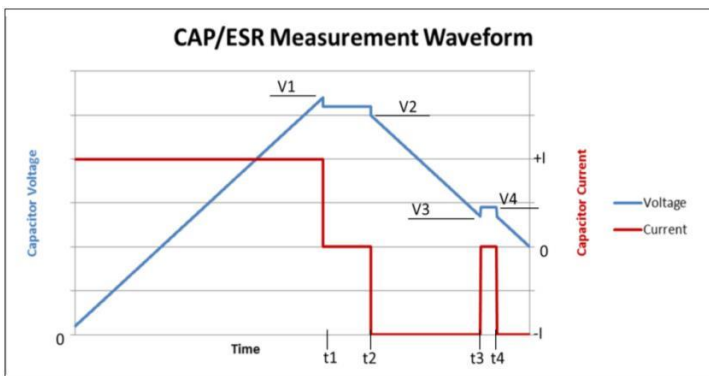


$V1 = V_{\text{rated}}$        $t2 - t1 = 15 \text{ seconds}$        $\text{Capacitance} = I \times (t3 - t2) / (V2 - V3)$   
 $V3 = 0.5 \times V_{\text{rated}}$        $t4 - t3 = 5 \text{ seconds}$        $ESR = (V4 - V3) / I$

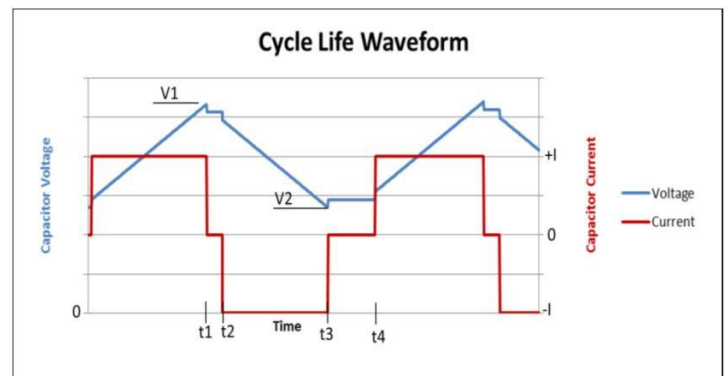

$V1 = V_{\text{rated}}$        $t2 - t1 = 5 \text{ seconds (I=0)}$   
 $V2 = 0.5 \times V_{\text{rated}}$        $t4 - t3 = 15 \text{ seconds (I=0)}$

## BMOD0165 P048 C0B

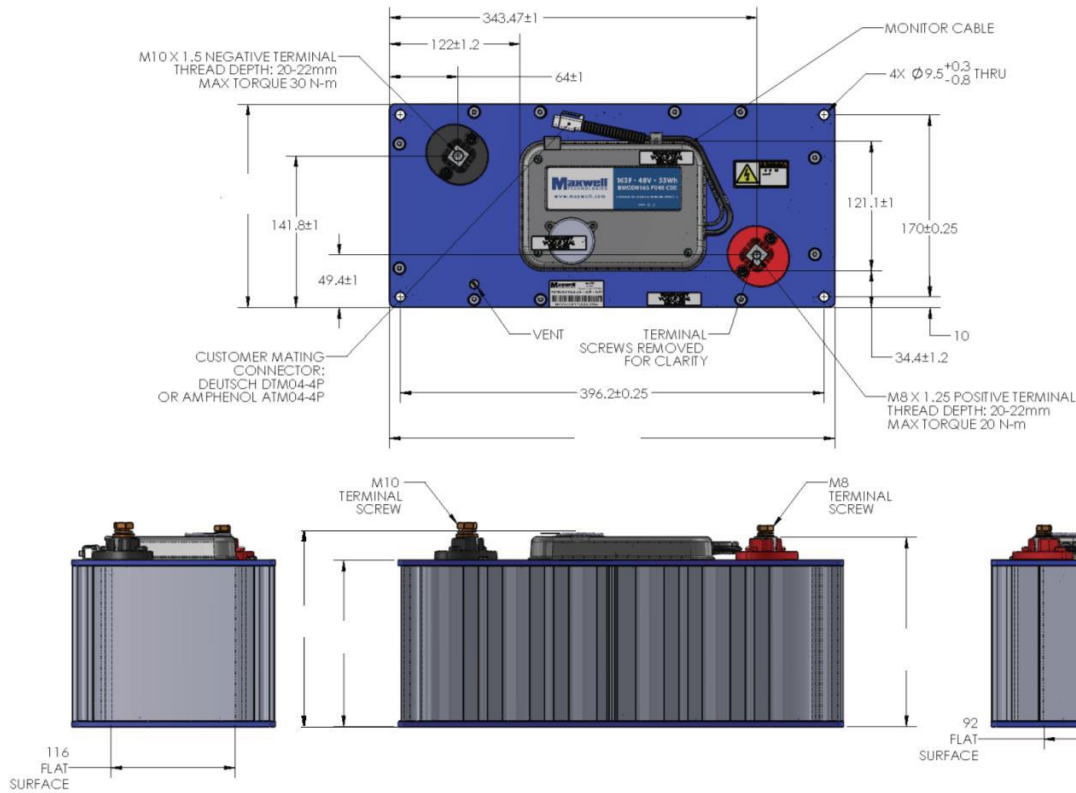

Part Description	Dimensions (mm)				
	L (max)	W (max)	H1 (max)	H2 (max)	H3 (max)
BMOD0165 P048 C0B	418	194	179	157	181

Product dimensions are for reference only unless otherwise identified. Product dimensions and specifications may change without notice. Please contact Maxwell Technologies directly for any technical specifications critical to application. All products featured on this datasheet are covered by the following U.S. patents and their respective foreign counterparts: 6643119, 7180726, 7295423, 7342770, 7352558, 7384433, 7440258, 7492571, 7508651, 7580243, 7791860, 7816891, 7859826, 7883553, 7935155, 8072734, 8098481, 8279580, and patents pending.

**Maxwell Technologies, Inc.**  
**Global Headquarters**  
3888 Calle Fortunada  
San Diego, CA 92123  
USA  
Tel: +1 (858) 503-3300  
Fax: +1 (858) 503-3301

**Maxwell Technologies SA**  
Route de Montena 65  
CH-1728 Rossens  
Switzerland  
Tel: +41 (0)26 411 85 00  
Fax: +41 (0)26 411 85 05

**Maxwell Technologies, GmbH**  
Leopoldstrasse 244  
80807 Munich  
Germany  
Tel: +49 (0)89 4161403 0  
Fax: +49 (0)89 4161403 99

**Maxwell Technologies Shanghai Trading Co. Ltd.**  
Room 1005, 1006, and 1007  
No. 1898, Gonghexin Road,  
Jin An District, Shanghai  
2000072, P.R. China  
Tel: +86 21 3852 4000  
Fax: +82 21 3852 4099

**Maxwell Technologies Korea Co., Ltd.**  
Room 1524, D-Cube City  
Office Tower, 15F #662  
Gyeongin-Ro, Guro-Gu,  
Seoul, South Korea  
152-706  
Tel: +82 10 4518 9829

MAXWELL TECHNOLOGIES, MAXWELL, MAXWELL CERTIFIED INTEGRATOR, ENABLING ENERGY'S FUTURE, BOOSTCAP, D CELL and their respective designs and/or logos are either trademarks or registered trademarks of Maxwell Technologies, Inc. and may not be copied, imitated or used, in whole or in part, without the prior written permission from Maxwell Technologies, Inc. All contents copyright © 2021 Maxwell Technologies, Inc. All rights reserved. No portion of these materials may be reproduced in any form, or by any means, without prior written permission from Maxwell Technologies, Inc.